



RE-EVALUATE YOUR BUSINESS

BENNA FRANTOIO

La Benna Frantoio della serie FB consente la frantumazione di materiale inerte direttamente in cantiere offrendo quindi 2 importanti vantaggi: il primo per la possibilità di un riutilizzo immediato in loco, il secondo per la facilità di trasporto del materiale trattato (ottimizzazione del carico).

La regolazione delle mascelle consente di ottenere una pezzatura in uscita con granulometria compresa tra 15 e 130 mm.

- > 5 modelli disponibili
- > Mascella a movimento roto-traslatorio
- > Protezioni anti-usura interne sostituibili (da FB300 HD)
- > Mascelle reversibili
- > Trasmissione a cinghia con motore idraulico a pistoni
- > Ingrassaggio centralizzato

CRUSHER BUCKET

Jaw Crusher Bucket, FB Series, is an excavator-mounted bucket attachment that allows for portable and affordable crushing operations on site.

It processes material to produce sub base on site, using available materials at a fraction of the price of purchasing or renting a traditional portable jaw crusher.

A quick and easy adjustment of the thickness of incoming material allows one to adjust output material size from 15 mm (0,6 inch) down to 130 mm (5,0 inch).

- > 5 sizes available
- > Eccentric-moving jaws system
- > Replaceable HD anti-wear plates (from FB300 HD)
- > Interchangeable and reversible crushing jaws kit with plow bolts system
- > Powerful Piston Motor
- > Centralized greasing system

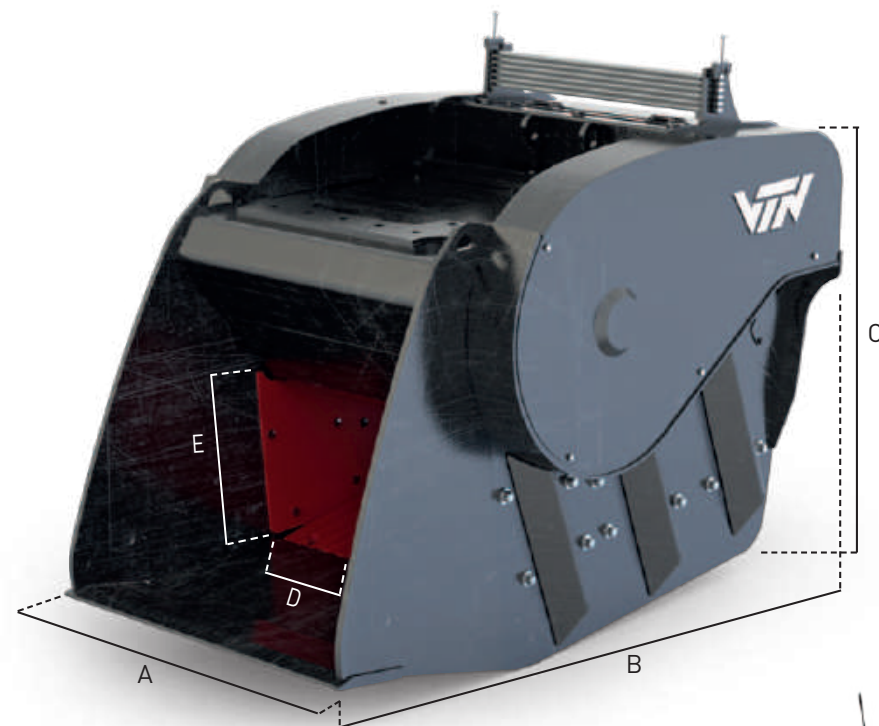
GODET CONCASSEUR

Le godet concasseur FB permet le concassage des matériaux directement sur site.






La réduction volumétrique du matériau traité est facilitée, pratique et abordable par rapport à l'achat ou à la location d'un concasseur à mâchoires traditionnel.

L'ajustement de la taille du matériau à l'entrée permet d'obtenir une taille régulière du matériau en sortie de 15 mm (0,6 pouces) à 130 mm (5,0 pouces).

- > 5 tailles disponibles
- > Système de mâchoires excentriques
- > Plaques anti-usure intérieures latérales HD (à partir de FB300 HD)
- > Kit de mâchoires interchangeables avec système de boulons plow bolts
- > Moteur à piston très puissant
- > Système de graissage centralisé



RECYCLING

 t min/max · lb min/max			Model	FB150 HD	FB200 HD	FB300 HD	FB350 HD	FB500 HD		
FB150 HD	10	12 / 16	A	mm	740	850	1030	1130	1420	
	22000	26000 / 35000		in	29,1	33,5	40,6	44,5	55,9	
FB200 HD	13	15 / 24	B	mm	1800	1800	2050	2150	2250	
	29000	33000 / 53000		in	70,9	70,9	80,7	84,6	88,6	
FB300 HD	19	23 / 32	C	mm	1100	1170	1330	1400	1450	
	42000	50000 / 71000		in	43,3	46,1	52,4	55,1	57,1	
FB350 HD	26	30 / 40	D	mm	600	700	820	920	1220	
	57000	66000 / 88000		in	23,6	27,6	32,3	36,2	48,0	
FB500 HD	34	38 / 54	E	mm	450	450	500	500	550	
	75000	84000 / 120000		in	17,7	17,7	19,7	19,7	21,7	
					m ³	0,5	0,6	0,65	0,7	1,05
					yd ³	0,7	0,8	0,9	0,9	1,4
					l/min	90 / 100	115 / 125	130 / 140	170 / 180	250 / 300
					gal/min	23 / 26	30 / 32	34 / 36	44 / 47	65 / 79
					bar	260 / 270	290 / 300	290 / 300	290 / 300	290 / 300
					psi	3768 / 3913	4202 / 4347	4202 / 4347	4202 / 4347	4202 / 4347
					kg	1670	2030	3070	4220	5915
					lb	3711	4511	6822	9378	13144
				Option						
				Elettro Magnete su richiesta - Electro-Magnet on request - Electro-Aimant sur demande						